




GAP SC

Sistema a sospensione, LED integrato, diffusori cilindrici in alluminio anodizzato o verniciato. Luce diretta e laterale.
Cylindrical pendant system, integrated LED, diffusers in anodized or painted aluminium. Direct and on the side light.

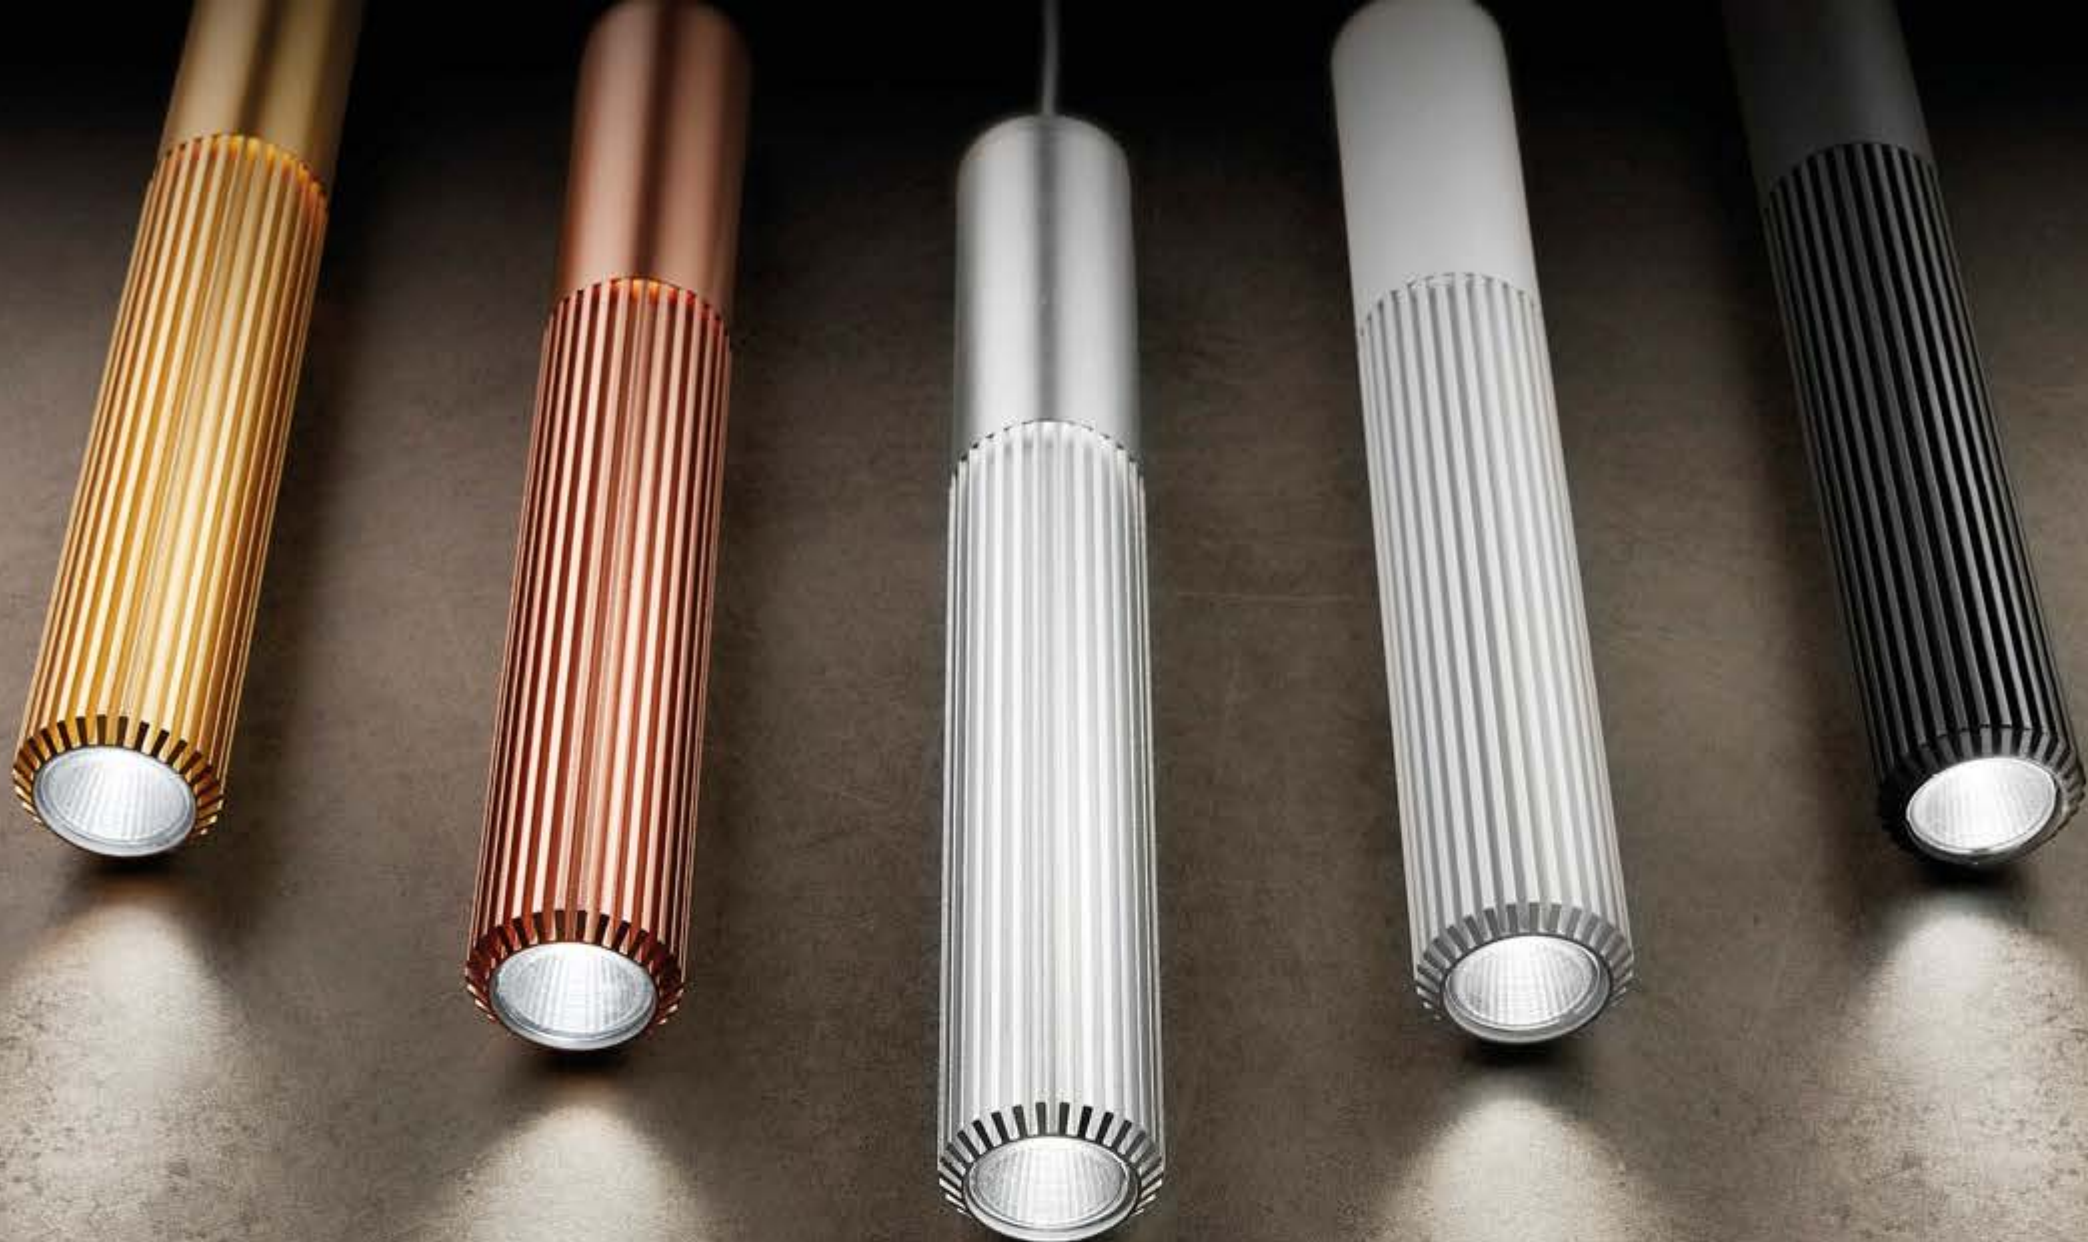

LED INTEGRATO
LED device



K- SWITCH
3000K - 4000K




CRI 90



BIEMISSIONE
Double emission



ROSONE TIPO C
Ceiling cup type C

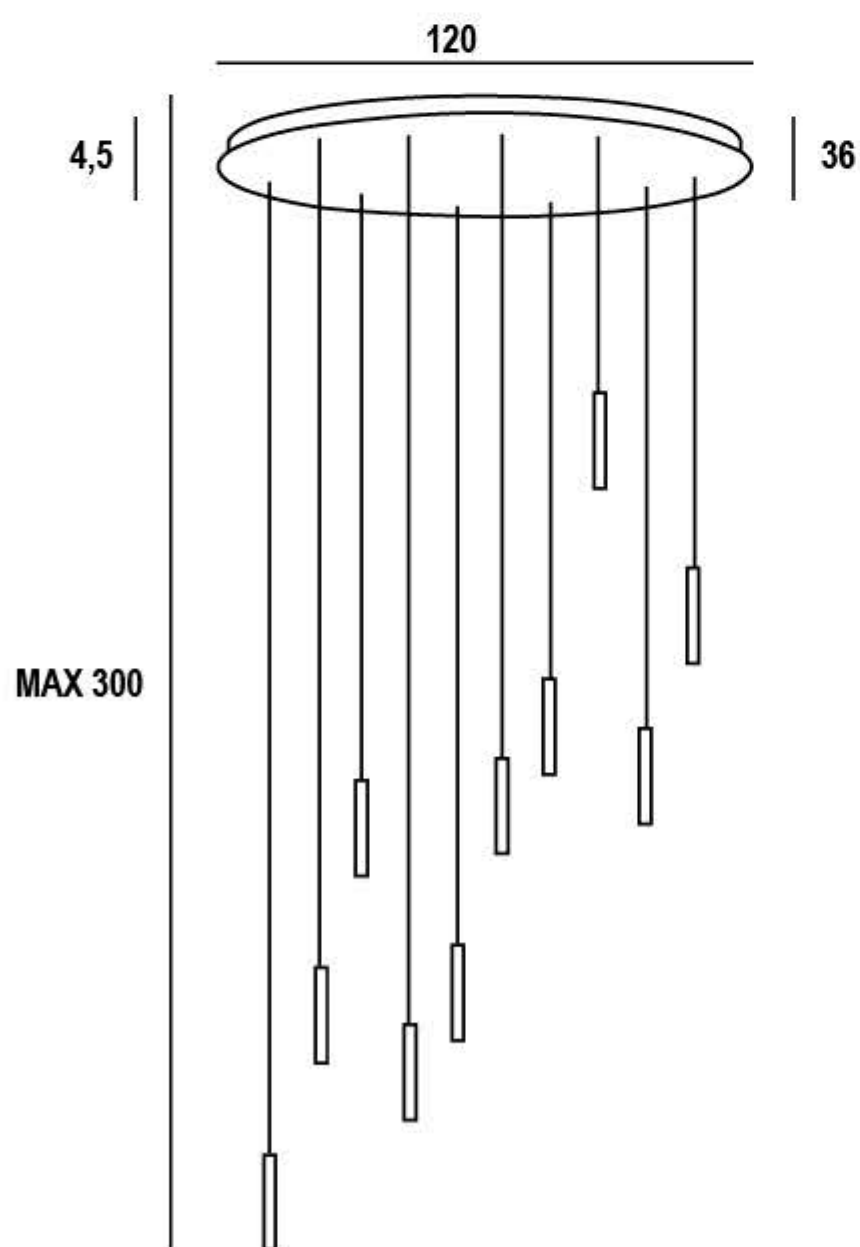

GAP S10C

Dimensioni / Size

L 120 P 36 H MAX 300 cm

Sorgente luminosa - potenza
Light source - power

LED 80 Watt
V/in 220/240 - V/out 30/42
LM: SOURCE 8800 (REAL 6800)
CCT 3000 / 4000K
IP20
CRI 90

FINITURE DISPONIBILI
FINISHES AVAILABLE

BASIC

